

JBC

www.jbctools.com

P&P
Guide



WSB

High-Temperature Wire Stripper Station

This Plug & Play Guide corresponds to the following references:

Ref.

WSB-9B (100 V)

WSB-1B (120 V)

WSB-2B (230 V)

Station

More Information at the
product web page



Packing List

The following items are included according purchased station reference:



WS
High-Temperature Wire Stripper
Control Unit 1 unit
 Ref. WS-9UA (100 V)
 Ref. WS-1UA (120 V)
 Ref. WS-2UA (230 V)

WSBT
Stand for WS440 1 unit
 Ref. WSBT-B


WS440
High-Temperature Wire Stripper
Tweezers 1 unit
 Ref. WS440-B



SCH
Cartridge Holder 1 unit
 Ref. SCH-A

PLR196
Cartridge Extractor Pliers 1 unit
 Ref. PLR196

Installation

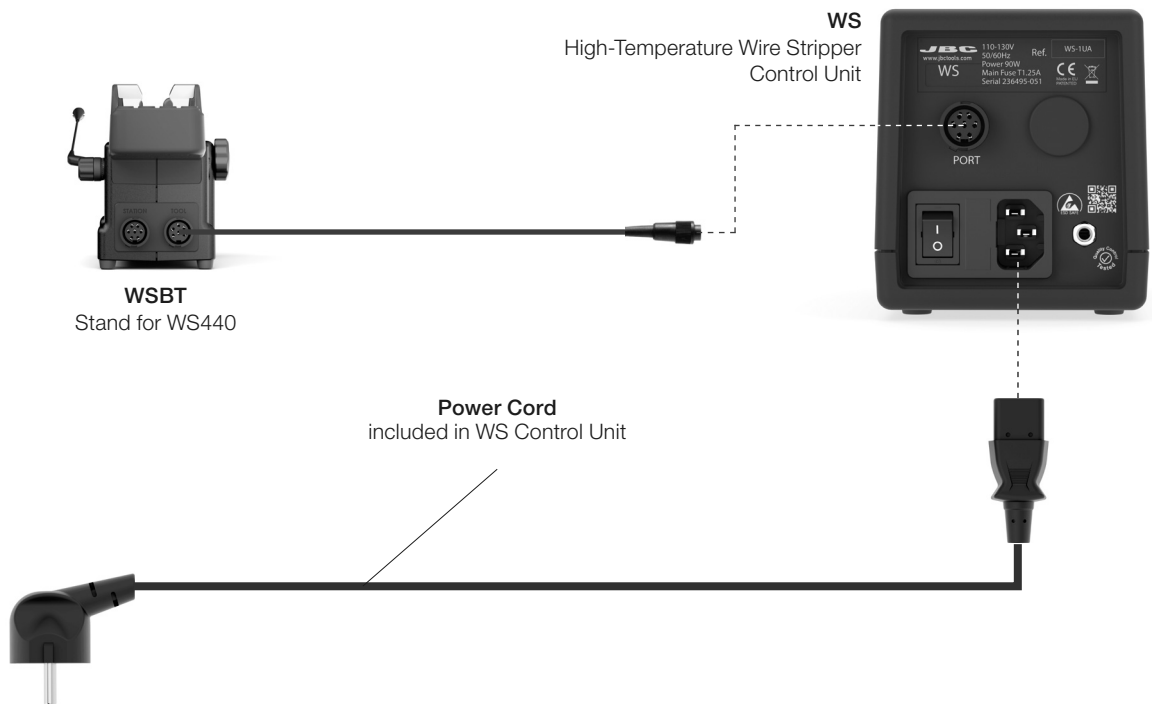

Installation



WS
High-Temperature
Wire Stripper Control Unit

WSBT
Stand for WS440



W440
Cartridge Range
(not included)



WS440
High-Temperature
Wire Stripper Tweezers

Specifications

WSB

High-Temperature Wire Stripper Station

Ref.: **WSB-9B** 100 V 50/60 Hz. Input Fuse: T1.6A. 5x20 mm Output: 15 V

Ref.: **WSB-1B** 120 V 50/60 Hz. Input Fuse: T1.25A. 5x20 mm Output: 15 V.

Ref.: **WSB-2B** 230 V 50/60 Hz. Input Fuse: T0.63A. 5x20 mm Output: 15 V.

- Package Dimensions / Weight: 387 x 352 x 190 mm / 5.48 kg
(L x H x W) 15.24 x 13.86 x 7.48 in / 12.08 lb

Complies with CE standards.
ESD safe.

JBC

Warranty

Information regarding the warranty of each product can be found on the final page of its instruction manual.



This product should not be thrown in the garbage.

In accordance with the European directive 2012/19/EU, electronic equipment at the end of its life must be collected and returned to an authorized recycling facility.